



The  
Patent  
Office

PCT / IB 98 / 00999  
30.06.98

The Patent Office 998  
Concept House  
Cardiff Road PCT

Newport  
South Wales  
NP9 1RH

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

14th may 1998



# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

40699 GB

2. Patent application number

(The Patent Office will fill in this part)

9713850.7

30 JUN 1997

3. Full name, address and postcode of the or of each applicant (underline all surnames)

AMP Deutschland GmbH  
Carl-Benz Strasse 12-14  
64625 Bensheim  
Germany

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Bensheim, Germany

4. Title of the invention

SECURITY THREAD

5. Name of your agent (if you have one)

BARON & WARREN

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

18 South End  
Kensington  
LONDON  
W8 5BU

Patents ADP number (if you know it)

281001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8

Claim(s) 1

Abstract 1

Drawing(s) 2 + 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature Baron 4 Warren Date 30-06-97  
Agents for the Applicant

12. Name and daytime telephone number of person to contact in the United Kingdom

KEITH S WARREN - 0171-937 0294

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Continuation of <sup>Part 3 of 3/1/77</sup> ~~question 5.~~

File/77  
D.W.  
3/1/77

Applicants:

The Whitaker Corporation  
Suite 450  
4550 New Linden Hill Road  
Wilmington  
DE 19808  
United States of America

6199079001

The Governor and Company of The Bank of England  
Threadneedle Street  
London -  
EC2R 8AH  
Great Britain

6084891001



SECURITY THREAD

5 This invention relates to a security thread for protecting documents, banknotes, or identification cards against forgery.

10 In banknotes, it is common to find security threads in the form of thin strips imbedded in paper, such strips of a magnetic material provided with magnetic coding. The strip may be provided with a metalised layer either side of the magnetic material, the metallisation also used to print fine characters as a further security feature. As mechanical support and protection, the magnetic material and metallisation layers are sandwiched between plastic (polyester) layers.

20 It is also known to provide piezoelectric film in security documents as described in US 4,763,927 or US 4,792,667, the presence of piezoelectric material being detectable by mechanical or poyroelectric testing means. In US 4,792,667, pre-poled films of polymeric material made from polyvinylidene fluoride (PVDF) or other polymeric piezoelectric materials are fixed to documents for security. Piezoelectric films with poled regions may not provide sufficient security for certain documents such as banknotes.

25 It would be desirable to further enhance the security against forgery of security threads. It would also be advantageous to provide additional features in a security thread that enable easy detection or that





provide a redundant control in the event the primary security feature is defective. It is desirable to provide security means that are well adapted for manufacture in large quantities, and which are cost-effective to manufacture whilst enhancing security against forgery, reliability, and ease of detection.

It is an object of this invention to provide an improved security thread with enhanced security against forgery and ease of detection.

Objects of this invention have been achieved by providing the security thread according to claim 1. Disclosed herein is a security thread comprising a magnetic layer sandwiched between protective layers, wherein at least one of the protective layers is a piezoelectric polymer. Advantageously therefore, a particularly compact and cost-effective security thread is provided with enhanced security features. The magnetic material may be coded as is typical for conventional security threads, wherein the piezoelectric polymer layer may also have a series of juxtaposed poled and unpoled regions. The poled and unpoled regions may form a binary code such that both the magnetic and the piezoelectric layers means; the magnetic layer being readable by a magnetic head, and the piezoelectric layer readable by a conductor or capacitive receptor after stimulation of the piezoelectric poled regions by mechanical (ultrasound) or pyroelectric (infrared rays) transmitters. On either side of the magnetic layer, there may be provided a metallisation layer, one of the



metallisation layers thus being sandwiched between the magnetic layer and the piezoelectric layer and also forming an electrode for the piezoelectric poled regions, in particular forming the ground electrode. The  
5 metal layer also reflective to light thereby concealing the magnetic layer, and also forming a means for printing characters that can be read when light is passed through the metallisation layer. Compound security measures can thus be provided in a particularly  
10 compact security thread, requiring various detection means that enhances security against forgery.

Embodiments of this invention will now be described by way of example, with reference to the accompanying drawings, in which:

15 figure 1 is a cross-sectional view through a security thread according to this invention, the thread shown partially laminated;

figure 2 is a view similar to figure 1 different embodiment according to this invention.

20 figure 3 is a simple schematic view representing dipoles in a portion of piezoelectric layer taken in cross-section;

figure 4 is a simple schematic view illustrating how a piezoelectric layer is polarised;

25 Referring to figure 1, a security thread 2 is shown in longitudinal cross-section. The security thread may be of substantially similar shape and dimension as a conventional security thread embedded in banknotes or security documents, for example in the form of a thin



elongate thread traversing a banknote. The security thread 2 comprises a magnetic layer 4 sandwiched between polymeric layers 6, 8 either side of the magnetic layer 4. The polymeric layers 6, 8 may be of different materials, for example a first layer 6 being of simple polyester or other flexible plastic material, and the second layer 8 being of a piezoelectric material such as polyvinylidene fluoride (PVDF) or other piezo electric polymeric material. It is also possible to provide the second layer 8 as a simple flexible plastic layer such as polyester, coded or printed on one side thereof with a piezoelectric material such as polymer(VDF/TrVE) or vinylidene/tetrafluorithethylene co-polmer (VDF/TFE).

The flexible polymeric layers 6, 8 are also protective layers that support and protect the magnetic layer 4 therebetween from mechanical damage. The magnetic layer 4 may be coded magnetically along its length (direction L) such that each security thread has a distinctive magnetic code readable by a detection device having a magnetic head. The magnetic layer 4 is shown in figures 1 and 2 as a layer separately laminated between the polymeric layers 6, 8, but the magnetic layer may also be printed or deposited otherwise on one of the polymeric support layers 6, 8, for example the simple polymeric (polyester) layer 6. The polymeric layer 6 with the deposited magnetic layer 4 would then be bonded to the other polymeric layer 8 by means of a conventional adhesive.



A metallisation layer 10 is provided between the magnetic layer 4 and the piezoelectric layer 8. The metallisation layer 10 may be deposited on the piezoelectric layer 8 by sputtering or other conventional metal deposition methods for depositing metals on substrates or the like. The metallisation may also be etched in certain places to form characters that are readable when light is shone through the security thread. The electrode 10 further acts as a ground electrode for contacting an inner side 11 of the piezoelectric layer 8 to ground, the opposing other side 12 of the piezoelectric layer 8 being readable by a detection device, for example a conductive member biased thereagainst. When subject to mechanical deformation, piezoelectric material produces electrical charges, an electrical potential thus being developed between the inner and outer layers 11, 12. The electrical charge that develops can either be read by an electrical detector connected to the ground electrode 10 and the charge electrode layer 12, or by capacitive detection means that responds to the electrical field created by the electrical charges. Piezoelectric materials such as PVDF also have a pyroelectric effect, whereby when subject to heat (for example from a light source emitting infrared) the heating of the piezoelectric creates an electric potential between the opposed layers 11, 12. Detection of the pyroelectric effect may for example be effected by the detection device described in International Application WO 97/07478.





As shown in figure 1, the polymeric layer 6 may also be provided with a metallisation layer 14 on its inner side 15. This metallisation layer may similarly be provided with characters.

5        In the embodiment of figure 1, the piezoelectric layer 8 is substantially uniformly charged (poled) piezoelectrically along the whole length thereof. As illustrated in figure 2, in a second embodiment the piezoelectric layer 8 is provided with a series of poled  
10        regions 16 and unpoled regions 18. The poled and unpoled regions may have lengths that are multiples of a smallest bit length, as depicted in figure 2 by the poled region 19, such that the piezoelectric layer 8 has a binary code extending along its length L. By  
15        mechanical excitation such as ultrasound, a conductive detector can pick up the electrically charged areas along the length, thereby reading the binary code.

      It is also possible to charge piezoelectric material such as PVDF, either negatively or positively  
20        such that certain of the poled regions are positive and certain of the poled regions are negative. In this way, it is also possible to provide a tertiary code rather than a binary code. The latter is illustrated in figure 4 which schematically illustrates the dipole orientation  
25        in a portion of polymeric piezoelectric layer. The horizontal dipoles 20 indicate a non-piezoelectric area and the vertical dipoles 21, 22 represent respectively negative and positively poled areas.



The coded piezoelectric layer 8 of the embodiment of figure 2 can be made by positioning a ground electrode 24 against one side of the layer 8 (for example the metallised ground layer 10) and positioning charge electrodes 26 on the charge side 12 of the layer 8. The charge electrodes 26 may be provided with a high positive or negative voltage depending on whether positive poled regions or negative poled regions are desired. The charge electrodes 26 may be held together in a single structure, with a dielectric (such as a ceramic or air) separating the poling regions. The electrodes may be provided on a rotating drum, the grounded electrode forming a opposed rotating drum with the piezoelectric layer sandwiched therebetween such that a continuous lamination of the piezoelectric layer 8 with piezoelectric poling can be effected.

As illustrated in figure 2, the first polymeric layer 6 may also be a piezoelectric layer, for example charged with a binary code that may either differ from the binary code of the layer 8 as indicated by the piezoelectric charged regions 16' and immediate non-charged regions 18'. It is also possible to provide the first layer 6 with the same binary code as the second layer 8 to enhance the reliability in the event one of the layers is defective. The second metallisation layer 14 could also act as the ground electrode for the piezoelectric layer 6 in a similar manner to the ground electrode for the piezoelectric layer 8.



A particularly compact security thread with enhanced security measures is thus provided in a compact form. The means of detecting the security thread based on different physical effects such as the magnetic field of the magnetic layer 4 and the electrical field or potential differences of the piezoelectric layer or layers 6, 8, significantly increases difficulty of forgery.



CLAIMS

1. A security thread comprising a magnetic layer sandwiched between protective layers, wherein at least  
5 one of the protective layers is a piezoelectric polymer.

2. The security thread of claim 1 wherein the piezoelectric polymer layer has poled and unpoled regions forming a binary or tertiary code.  
10

3. The security thread of claim 1 or 2 wherein a pair of the protective layers, one either side of the magnetic layer, is a piezoelectric polymer.

15 4. The security thread of claim 3 wherein each of the piezoelectric layers has poled and unpoled regions.

5. The security thread of any one of the preceding claims wherein the thread further comprises a  
20 metallisation layer between the piezoelectric polymer layer and the magnetic layer.

6. The security thread of claim 5 wherein the metallisation layer acts as a ground electrode for the  
25 piezoelectric layer.

7. A security thread constructed substantially as hereinbefore described with reference to the accompanying drawings.





ABSTRACT

SECURITY THREAD

5 A security thread 2, for identification of security documents such as banknotes, has a magnetic layer 4 sandwiched between polymeric layers 6, 8, where one of the layers 8 is a piezoelectric layer such as PVDF. The piezoelectric layer 8 may be poled intermittently such the piezoelectric layer is coded. A particularly compact security thread with enhanced multiple coded features is  
10 thus provided. (Figure 2)



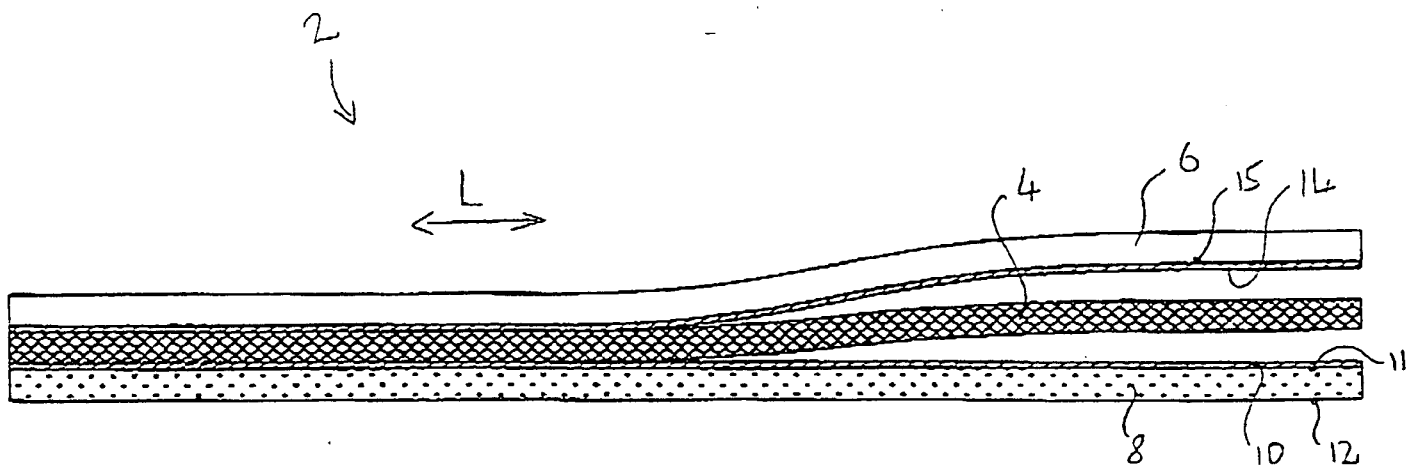


FIG 1


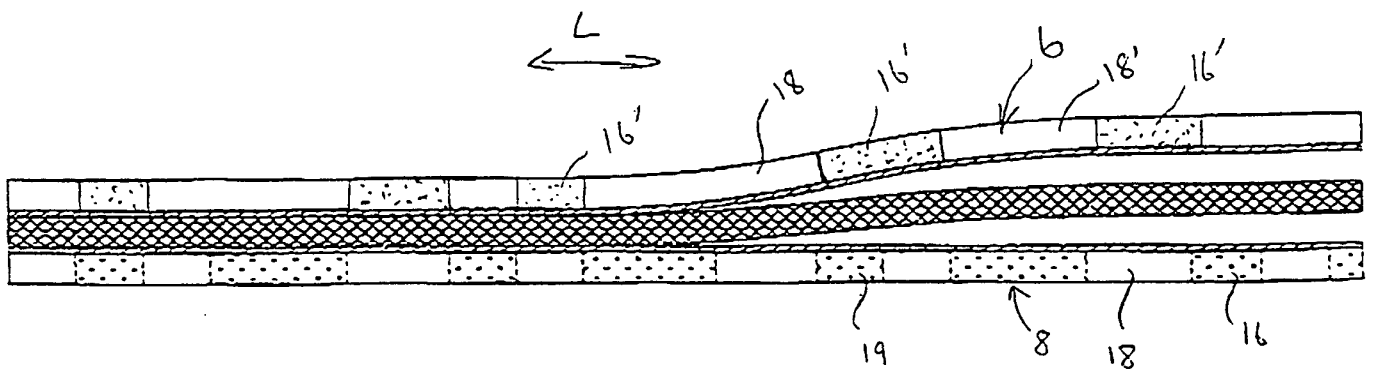


FIG 2



2/2

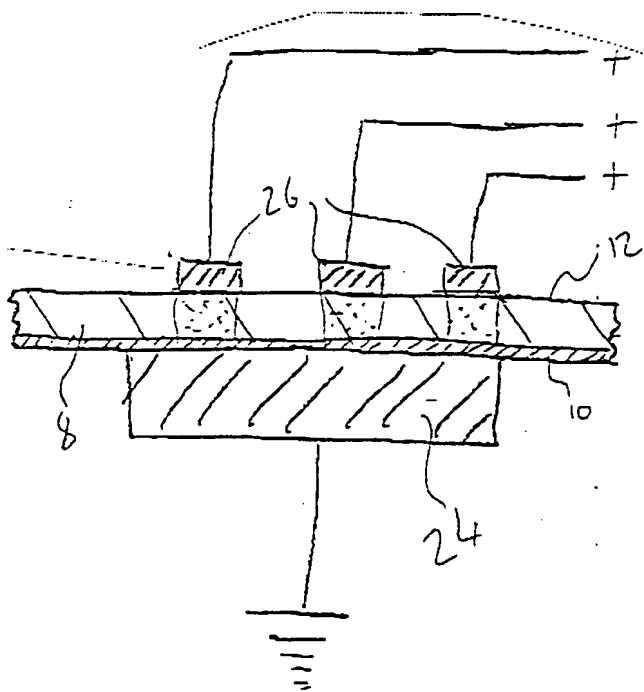


FIG 4

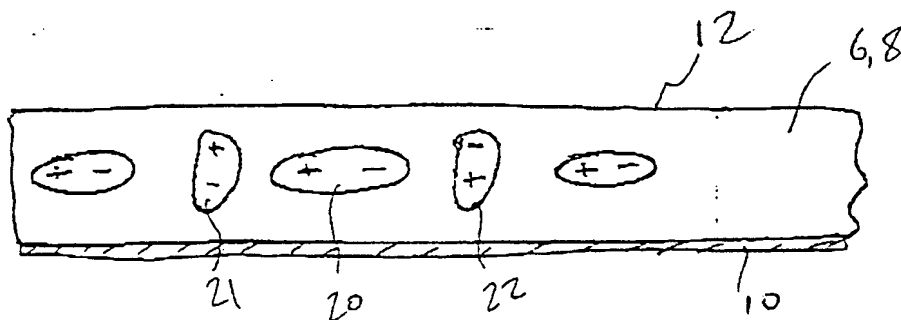


FIG 3

